


Keor DC

UPS for Modem / Router
and connected devices



GLOBAL SPECIALIST IN ELECTRICAL AND DIGITAL
BUILDING INFRASTRUCTURES

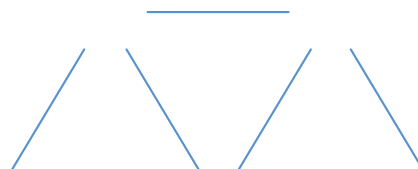

Keor DC

STAY CONNECTED

Keor DC is the new UPS designed to provide the continuity of operation in case of power failure to all Internet connected devices such as modem, router, cordless or VoIP phones.

Its elegant and modern design, with ultra-compact dimensions, allows it to adapt perfectly to the home, even in small spaces.

Thanks to the lithium-ion battery with **2200 mAh** capacity, the **Keor DC** guarantees a Backup time up to **90 minutes**.

Keor DC is powered via the **230 Va.c.** home network and can power most routers and phones on the market as it is equipped with **4 different power jacks**.

ELEGANT DESIGN AND ULTRA
COMPACT DIMENSIONS

SELECTABLE
OUTPUT VOLTAGE



KEOR DC

Single-phase DC




Item	UPS		
	Rated power (W)	Backup time (min)	Socket type
3 110 10	25	up to 90	DE standard
3 110 11			IT standard
3 110 12			UK standard
3 110 13			US standard

Characteristics

General characteristics	
Active power (W)	25
Input	
Input voltage	100 / 240 Va.c.
Input frequency	47-63 Hz
Input voltage range	90 - 264 Va.c.
Output	
Output voltage	9 - 12 - 15 - 19 Vd.c. selectable
Output frequency	50/60 Hz
Battery	
Type	Li-ion Battery
Recharging time (h)	3 (90% of the capacity)
Rated voltage	3,7 Vd.c.
LED indicators	
Full Battery	All LED-ON Green
Battery Discharging	Green LED, continuous Blinking (2s ON / 0.5s OFF)
Low Battery	Green LED, continuous Blinking (0.3s ON / OFF)
Fault	All LED-ON Blinking (0.3s ON / OFF)
Mechanical characteristics	
Dimension A x L x P (mm)	95 x 95 x 28.5
Weight (g)	300
Standard	
Certifications	EN55022, IEC/EN 62368-1, FCC: Class B, UL/cULus

POWER CONNECTORS

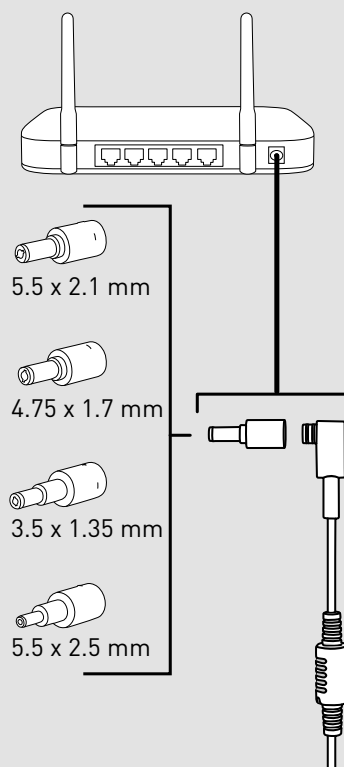

NOTE: the autonomy values, expressed in minutes, are estimated and may vary based on the characteristics of the load, operating conditions and the environment.



FOLLOW US
ALSO ON

@ www.ups-legrand.com



**World Headquarters and
International Department**
87045 Limoges Cedex - France
☎ : + 33 (0) 5 55 06 87 87
Fax : + 33 (0) 5 55 06 74 55