

NEW

CONFIGURATION GATEWAY


The new and innovative Configuration Gateway is a tool that allows to program and modify the operating parameters of the sensors of the KNX system, Lighting Management and SCS, using a smartphone and the dedicated APP.

Mobility at the service of installation and maintenance.

The smartphone must be connected to the gateway via the 'BLUETOOTH' protocol, while the gateway communicates with the sensors using IR (infrared) technology.



Examples of APP screens

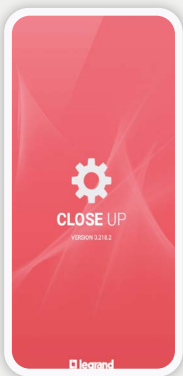

FEATURES:

- All the sensors are supplied with the factory settings:
 - Light level threshold 500 lux for ceiling sensors, 300 lux for wall-mounting and flush-mounting sensors
 - Delay time 15 minutes and walkthrough function activated
- The configuration gateway allows the adjustment of these presets and the detection sensitivity
- The configuration gateway can be used in conjunction with any IOS and Android device
- It is compatible with all stand alone/SCS/KNX lighting detectors and with all the Legrand NFC products

Main functions:

- Change of product settings
- Store and recall of product configuration files
- Easy configuration thanks to the copy/paste function
- Operational test functions.
- Self-diagnosis function

The gateway works with the "Legrand Close Up" App, available on the Android (Playstore) and iOS (Apple Store) platforms.

